
Stainless Steel-Cabinet "U" handles



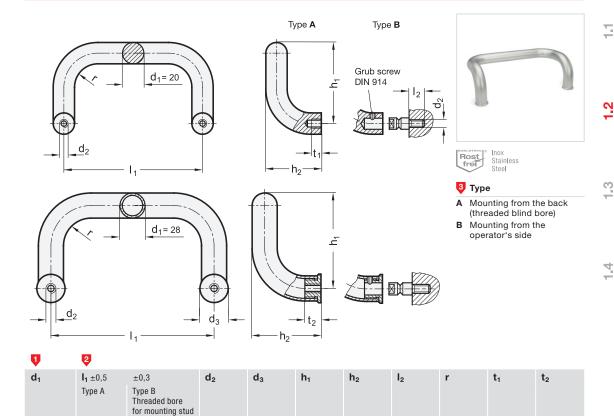

105

105

128

128

128

68

68

90

90

90

Specification

20

20

28

28

28

- Stainless Steel
 - $d_1 = 20$: solid material

200

300

250

350

500

200

300

250

350

500

- $d_1 = 28$: tube Ø 28 x 2
- AISI 304
- matt shot-blasted
- Threaded bushing / Mounting stud Stainless Steel AISI 303
- Grub screw (type B)
- d₁ = 20: DIN 914-M5-6-NI
- d₁ = 28: DIN 914-M6-8-NI
- Stainless Steel characteristics → Page 1489
- Load rating information → Page 1454
- RoHS compliant

Information

32

32

32

M 8

M 8

M 10

M 10

M 10

Stainless Steel-Cabinet "U" handles GN 426.6 can be mounted from the back (type A) as well as from the operator's side (type B). In this case the stud is first screwed in from the machine side and then the handle is pushed on and secured with the grub screw.

20

20

20

20

20

22

22

32

32

32

15

15

17

17

17

Both mounting methods allow the mounting of a pair of handles in opposite position. This method could be used e.g. on doors (double handle). In general, a mounting stud with special length l_2 might be required.

The manufacturing process (bending) allows the production of special lengths in relatively small quantities.

see also...

• Cabinet "U" handles GN 425.1 (Aluminum / Stainless Steel, angled)

→ Page 106

How to order	1	d ₁
GN 426.6-20-300-A	2	I ₁
	3	Туре

