


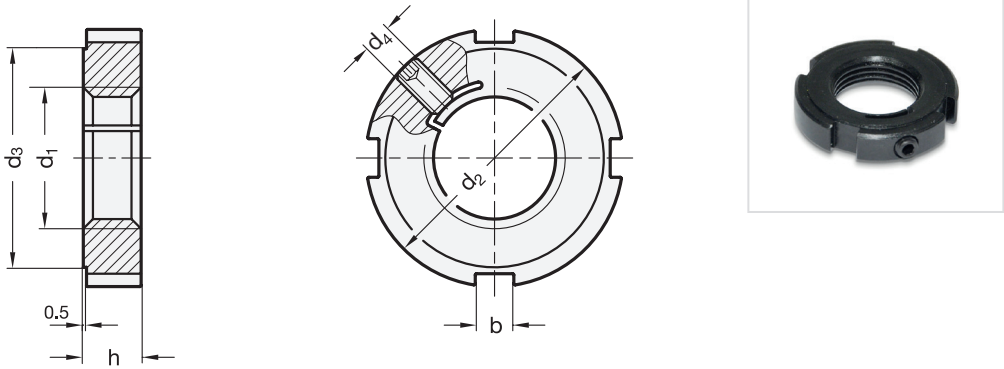

d ₁	d ₂	d ₃	d ₄	b	h	Code no. C-Spanner
M 12 x 1,5	28	23	M 4	5	6	DIN 1810-A25-28
M 14 x 1,5	30	25	M 4	5	7	DIN 1810-A30-32
M 16 x 1,5	32	27	M 5	5	7	DIN 1810-A30-32
M 18 x 1,5	34	28	M 5	6	8	DIN 1810-A34-36
M 20 x 1,5	36	30	M 5	6	8	DIN 1810-A34-36
M 22 x 1,5	40	34	M 5	6	9	DIN 1810-A40-42
M 24 x 1,5	42	36	M 5	6	9	DIN 1810-A40-42
M 30 x 1,5	50	43	M 5	7	10	DIN 1810-A45-50
M 35 x 1,5	55	48	M 6	7	11	DIN 1810-A52-55
M 40 x 1,5	62	54	M 8	8	12	DIN 1810-A58-62

Specification

- Nut
- Steel
- Tensile strength class 5.8
- blackened

ST

- Set screw
- Steel, blackened

• RoHS compliant

Accessory

- C-Spanner DIN 1810
(Code no. see table)

Information

GN 1804.2 slotted locknuts with thread locking can be secured against twisting by twisting off the threaded shaft via a d₄ set screw. The thread flanks of the nut ensure damage-free securing and can be used as often as needed.

The d₃ offset plane surface is intended as an axial contact surface.

How to order

1

d₁

2

Material

GN 1804.2-M20x1,5-ST