
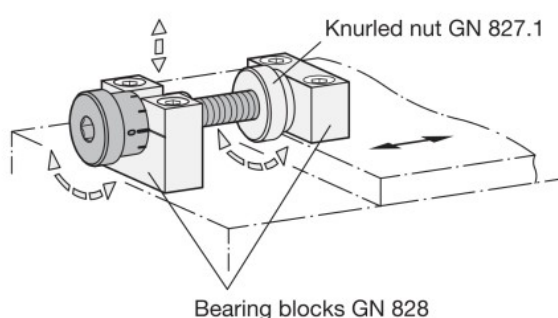


4 Coding

S With standard scale 0...0,5, 10 graduations

Application example



Bearing blocks GN 828

1

2

d ₁	l ₁			d ₂ ^{-0,4 -0,6}	d ₃	d ₄	l ₂ +0,1	l ₃	l ₄	s
M 6 x 1	20	35	50	6	10	16	10,1	14	2,9	5
M 8 x 1	30	45	60	8	14	20	12,1	16	3,9	6
M 10 x 1	40	60	80	10	16	24	15,1	18	5,9	8

Specification

- Stainless steel AISI 303
Matte shot-blasted
- Scale
Laser-engraved, black discharged
- Stainless Steel Characteristics → Page 2166
- RoHS

3

Information

Stainless steel adjusting screws GN 827 are used in combination with bearing blocks GN 828 for simple adjustment and positioning tasks.

For processing and assembly equipment on which attachments and mechanisms must be regularly exchanged, particularly simple adjustments can be achieved by combining adjusting screws GN 827, knurled nuts GN 827.1 and bearing blocks GN 828 of the types UA and UB to ensure that settings are retained even between uses.

Accessory

- Bearing Blocks GN 828
- Stainless Steel Knurled Nuts GN 827.1
→ Page 1932

How to order

1 2 3 4
GN827-M8X1-45-NG-S

1	d ₁
2	l ₁
3	Material
4	Coding