

Spring Plungers • headed, with ball and internal hexagon

EH 22030.



Product Description

Spring plungers can be used for locating or for applying pressure, as a detent or for ejection. Precise screwing depth due to head.

Material

Body

- Free cutting steel, blackened
- Stainless steel 1.4305

Ball

- Ball-bearing steel, hardened
- Stainless steel, hardened

Spring

- stainless steel


Assembly

Respect dimension l_3 for M 4 / M 5.


Characteristic

Standard spring load: no marking

Reinforced spring load: marked with two lines



Standard spring load



Heavy spring load

More information

Notes


Special types on request.

Spring plungers are specially tested for spring range and forces.


References

Thread lock on request, please refer to appendix - Technical Data -
Calculation of indexing resistance, please refer to appendix - Technical Data -

Drawing

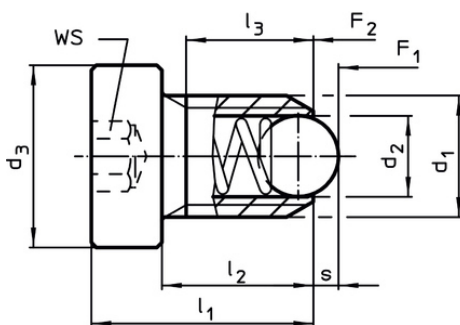

Size M4+M5

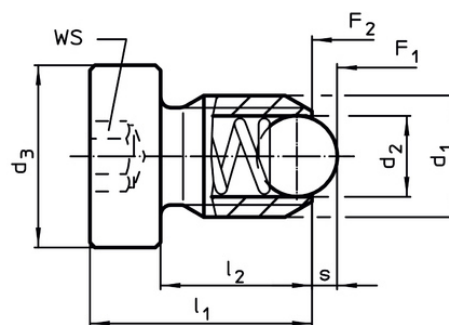

Size M6-M12

Order information

d ₁	d ₂	Dimensions				WS	Stroke s	Spring load ¹⁾		max. [°C]	g	Art. No.
		d ₃	l ₁	l ₂	l ₃ min.			F ₁ ~	F ₂ ~			
[mm]												
free cutting steel, standard spring load												
M 4	2.5	6	12	9.0	7.5	2.0	0.8	8.0	14.0	250	1.0	22030.0930
M 5	3.0	8	14	10.0	8.2	2.5	0.9	8.0	14.0	250	2.3	22030.0931
M 6	3.5	10	15	10.0	–	3.0	1.0	11.0	18.0	250	3.9	22030.0932
M 8	4.5	13	18	12.5	–	4.0	1.5	18.0	31.0	250	7.8	22030.0933
M10	6.0	16	23	17.0	–	5.0	2.0	24.0	45.0	250	14.0	22030.0934
M12	8.0	18	26	19.0	–	6.0	2.5	26.0	49.0	250	21.0	22030.0935

¹⁾ statistical average value