

Captive C-Washers • DIN 6371 with countersunk screw DIN 923 EH 22280.



Product Description

Material

Countersunk screw

- Steel, blackened, quality 5.8


Captive C-Washer

- Heat-treated steel, tempered, blackened

Assembly

The captive C-washers can be installed on both sides using the included bolt. You can select either clockwise or anti-clockwise rotation.

Drawing

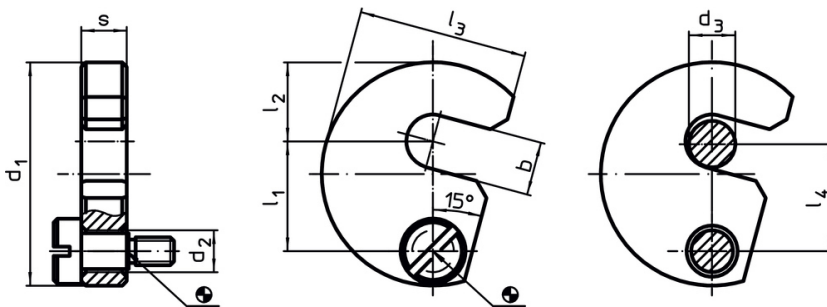

Order information

Nominal size d_3 [mm]	b	d_1	d_2	Dimensions [mm]					Suitable screw [mm]	 [g]	Art. No.
				l_1	l_2	l_3	l_4	s -0.2			
6	7.5	38	9	19.6	11	29.0	19	9.8	M6 x 10	66	22280.0006
8	9.5	43	9	21.6	14	32.5	21	9.8	M6 x 10	81	22280.0008
10	11.5	48	9	23.6	17	36.5	23	9.8	M6 x 10	99	22280.0010
12	13.5	61	11	29.6	22	45.0	29	11.8	M8 x 12	192	22280.0012
16	17.5	68	11	33.6	25	50.0	33	11.8	M8 x 12	229	22280.0016
20	21.5	74	11	36.6	28	55.0	36	11.8	M8 x 12	265	22280.0020
24	25.5	82	11	40.6	32	62.0	40	15.8	M8 x 16	430	22280.0024
30	32.0	97	11	49.0	39	73.0	48	15.8	M8 x 16	584	22280.0030