


SWIVEL TORQUE HINGE HG-S

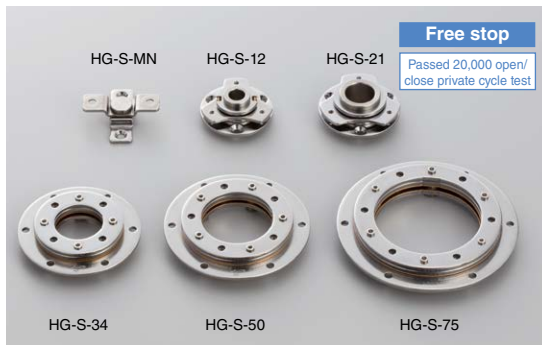

- HG-S-MN, HG-S-21 and HG-S-75 are newly launched.
- Rotation angle: 360°
- Centre hole for easy cable management (except for HG-S-MN). Five types of hole diameters ($\phi 12$, $\phi 21.5$, $\phi 34$, $\phi 50$, and $\phi 75$) are available.

[Applications]







- Operation panel of machine tools and LCD, etc.

[Remarks]


- Be sure to read the "Cautions" [1](#).
- Hinges can be used upside down. However, fix the screws from the mounting surface (refer to the "Installation" in relevant pages). Otherwise, the products will not function.
- * is horizontal use only.

[Selection Guide]

RoHS	CAD	Item Code	Item Name	No.	Size	Hole Diameter	Torque N·m/pc	Torque kgf·cm/pc	Page
		170-029-726	HG-S7-MN	1	56	—	0.7 $\pm 20\%$	7.1 $\pm 20\%$	2
		170-029-727	HG-S20-MN				2.0 $\pm 20\%$	20.4 $\pm 20\%$	
		170-021-976	HG-S30-12				3.0 $\pm 20\%$	30.6 $\pm 20\%$	
		170-021-975	HG-S50-12	2	$\phi 54$	12	5.0 $\pm 20\%$	51.0 $\pm 20\%$	3
		170-029-728	HG-S30-21				3.0 $\pm 20\%$	30.6 $\pm 20\%$	
		170-029-729	HG-S50-21				5.0 $\pm 20\%$	51.0 $\pm 20\%$	
		170-023-959	HG-S50-34	3	$\phi 60$	21.5	5.0 $\pm 20\%$	51.0 $\pm 20\%$	4
		170-023-960	HG-S70-34				5.0 $\pm 20\%$	51.0 $\pm 20\%$	
		170-023-961	HG-S70-50				7.0 $\pm 20\%$	71.4 $\pm 20\%$	
		170-023-962	HG-S100-50	4	$\phi 103$	50	7.0 $\pm 20\%$	71.4 $\pm 20\%$	
		170-029-730	HG-S50-75				10.0 $\pm 20\%$	102.0 $\pm 20\%$	
		170-029-731	HG-S70-75				5.0 $\pm 20\%$	51.0 $\pm 20\%$	
				6 *	$\phi 128$	75	7.0 $\pm 20\%$	71.4 $\pm 20\%$	

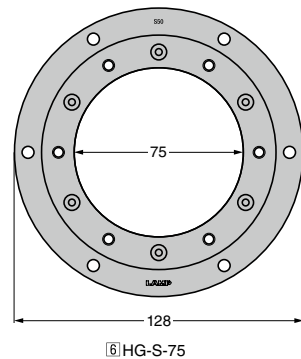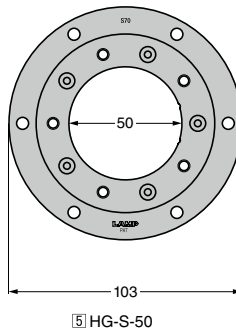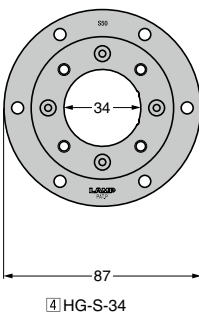

[Application Example]

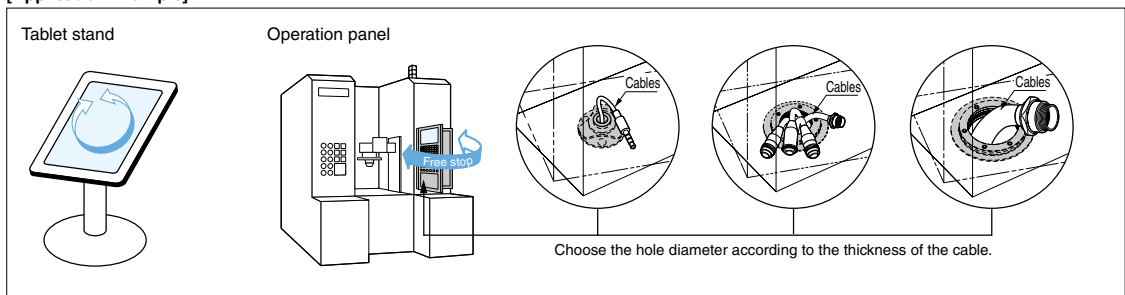

Refer to [1](#) : P.43, [2](#) : P.60, [3](#) : P.61, [4](#) : P.62