

HINGES

DETENT HINGE HG-FH128



[How to Install (Screws Included)]





Depth and horizontal adjustment can also be made after installation. Covers for the screw holes are included.

Fluororesin washer at rotation part ensures smooth operation.

[Applications]

Environmental test equipment, laboratory equipment, etc. [Parts Included]

Hexagon socket head cap screw M6×25 (SUS) Hexagon socket head cap screw M5×25 (SUS) Hexagon socket countersunk head screw M5×14 (SUS) Oval washer for M5 (SUS)



Video Link

HINGES DAMPER HINGES

LIFT

ASSIST HINGES

DETEN1

HINGES

CONCEALED HINGES

BUTT

HINGES

PIANO

STEP

LIFT-

OFF

HINGES

HINGES

HINGES

TORQUE

Washer 6 (SUS)










CLEAN ROOM HINGES HINGES FOR

ALUMINIUM

FRAME DROP HINGES

- GLASS DOOR
- HINGES

SPECIAL HINGES

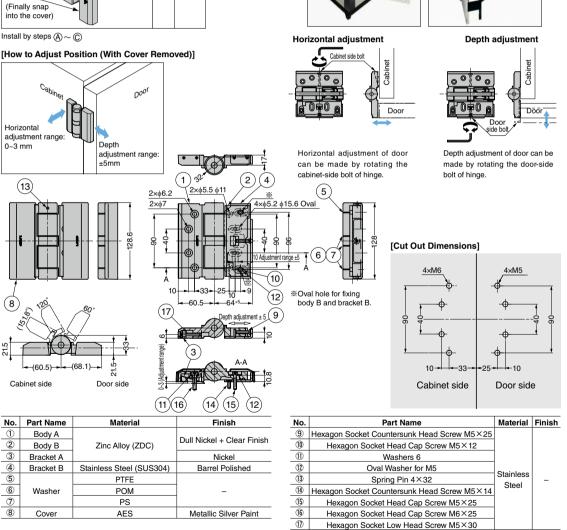

RoHS	CAD	Item Code	Item Name	Door Width	Door Height	Door Weight kg/Pair	Retaining Torque N·m/Pair	Retaining Torque kgf m/Pair	Weight (g)	Box (pcs)	Carton (pcs)
G	3D	170-090-317	HG-FH128	600~900	900~1200	Max. 40	10	102	1500	1	6



PIVOT HINGES