

KNOB FASTENER DBN Snap-in Installation



- Push into the mounting hole of panel to snap-in.
Few installation steps reduce cost.
- No retaining ring or washer is required for installation.
- Resin installation part prevents scratches on the painted surface.


[Applications]

- Switch boards, control equipment, distribution boards, etc.

[Cut Out Dimensions]




[Installation]

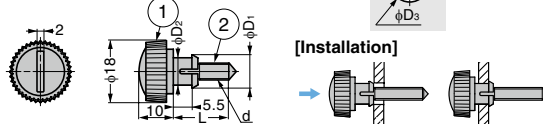

No.	Part Name	Material	Finish / Colour
①	Knob	POM	Black
②	Screw	See Below	See Below

RHS	CAD	Item Code	Item Name	Screw Material	Screw Finish	L	D ₁	D ₂	d	Hole Dia. D ₃	Board Thickness	Weight (g)	Box (pcs)	Carton (pcs)	
		100-011-915	DBN4-21SUS	Stainless Steel	Plain	22	9.5	8.2	M4	8.5	Max. 5	4.8	100	2000	
		100-011-916	DBN4-27SUS			27						5.3	100	2000	
		100-011-917	DBN5-21SUS			21						6.4	100	2000	
		100-011-918	DBN5-26SUS			26	10.5	9	M5	9.5		7	100	2000	
		100-011-919	DBN5-36SUS			36						8.2	100	2000	
		100-011-920	DBN6-21SUS			21	11.5	10	M6	10.5		8.5	100	2000	
		100-011-921	DBN6-26SUS			26						9.3	100	2000	
		100-011-922	DBN6-36SUS			36						11	100	2000	
		100-011-907	DBN4-21	Steel (SWCH)	Coloured Zinc Chromate (Trivalent)	22	9.5	8.2	M4	8.5		4.5	100	2000	
		100-011-908	DBN4-27			27						5.2	100	2000	
		100-011-909	DBN5-21			21						6.4	100	2000	
		100-011-910	DBN5-26			26	10.5	9	M5	9.5		8.1	100	2000	
		100-011-911	DBN5-36			36						8.4	100	2000	
		100-011-912	DBN6-21			21						9.2	100	2000	
		100-011-913	DBN6-26			26	11.5	10	M6	10.5		9.2	100	2000	
		100-011-914	DBN6-36			36						11	100	2000	

KNOB FASTENER BRF



[Applications]

- Switch boards, control equipment, distribution boards, etc.

No.	Part Name	Material	Finish / Colour
①	Knurled Knob	Brass	Chrome
②	Resin Washer	PA	Natural

RHS	CAD	Item Code	Item Name	L ₁	L ₂	D ₁	D ₂	d	Weight (g)	Box (pcs)	Carton (pcs)
		100-019-825	BRF-A3-6CR	8	6.5	12	8	M3	6	1	—
		100-019-823	BRF-A4-8CR	10	8	15	10	M4	13	1	—
		100-019-822	BRF-A4-13CR		13				14	1	—
		100-019-821	BRF-A5-7CR		7.5		12	M5	1	—	—
		100-019-820	BRF-A5-12CR	12.5	12.5				15	1	—

QUICK RELEASE LATCH DIGEST

Panel fasteners with latch also available.

Flush Slam Latch LC-65A 1




[Application Example]



Quick Release Latch SX-48 Snap-in Installation & Temporary Holding 13



[Application Example]



Quick Release Latch With Locking LC-PK32, LC-PL32 Snap-in Installation 2



LC-PK32-L-BL

LC-PL32-GR

LC-PL32-L-GR
(sold separately)

LC-PK32-K
(sold separately)

Refer to 1 : P.696, 2 : P.698, 3 : P.697

[Application Example]

Three latches can be released by one person.

