

3/4 EXTENSION SLIDE ESR8

**LOAD
CAPACITY** 245~481 N/pair**L=R****LOCK
OPENED****DETACH****SUS**


- 3/4 extension (2 members).

- The drawer can be held in fully opened position. Released by lever operation.

- The drawer is detachable by lifting the lever.

[Remarks]

- Be sure to read the "Cautions" 1.
- Some parts of this product are made of plastic.

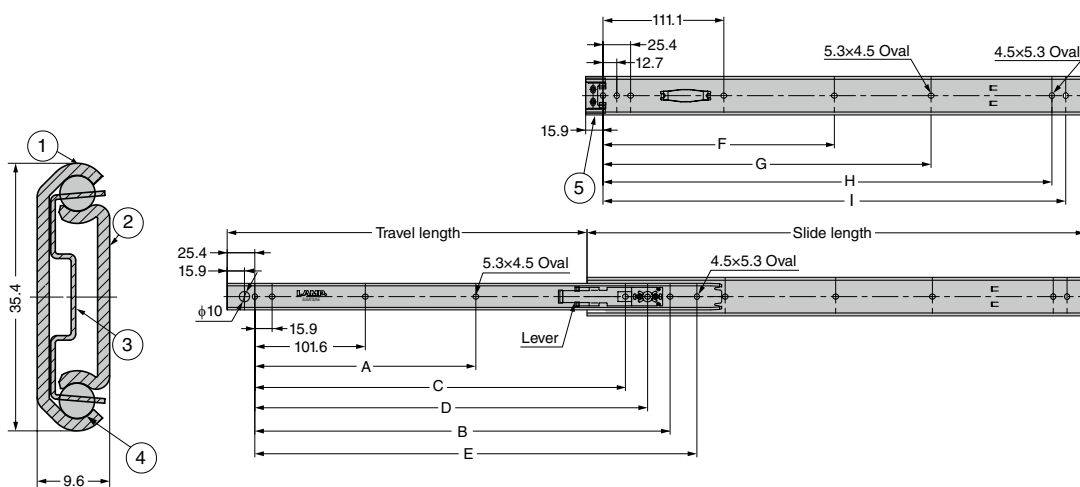

Side view (S=1/1)

No.	Part Name	Material	Finish / Colour
①	Outer Member	Stainless Steel (SUS304)	Plain
②	Inner Member		
③	Retainer		
④	Balls	POM	—
⑤	Guide		White

Sold by piece.

RoHS	CAD	Item Code	Item Name	Slide Length	Travel Length	A	B	C	D	E	F	G	H	I	Load Capacity N/pair	Load Capacity kgf/pair	Weight (kg/pc)	Box (pcs)	Carton (pcs)
		190-111-327	ESR8-12	304.8	228.6	152.4	-	-	259.5	-	-	149.2	260.3	273	481	49	0.3	30	-
		190-111-328	ESR8-14	355.6	279.4	310.3			200	311.1		323.8	461	47	0.4	30	-		
		190-111-329	ESR8-16	406.4	304.8	203.2			250.8	361.9		374.6	422	43	0.4	30	-		
		190-111-330	ESR8-18	457.2	330.2	340.7			366.1	406.4		212.7	301.6	412.7	425.4	402	41	0.5	30
		190-111-331	ESR8-20	508	381	228.6		391.5	411.9	457.2	238.1	352.4	463.5	476.2	363	37	0.5	30	-
		190-111-332	ESR8-22	558.8	406.4	254		416.9	437.3	508	263.5	403.2	514.3	527	333	34	0.6	30	-
		190-111-333	ESR8-24	609.6	432.8	279.4		443.3	463.7	558.8	288.9	454	565.1	577.8	294	30	0.6	30	-
-		190-111-334	ESR8-26	660.4	482.6	304.8		493.1	513.5	609.6	314.3	504	615.9	628.6	265	27	0.7	30	-
		190-111-335	ESR8-28	711.2	508	330.2	558.9	538.9	558.8	660.4	339.7	555.6	666.7	679.6	245	25	0.7	30	-

Refer to 1 : P.549